

87024 Floorpanel



Outstanding for both new construction and retrofit.



Unique design easily secures 3/8" PEX Tubing @ 8" O.C. spacing in any direction; straight, turns, or both.

24" x 24" x 5/8" overall dimensions allows for straightforward material calculations (sq.ft./4).

Foil faced (.02 mil) aluminum cover for maximum heat transfer.

Butt joint edges allows for quick installation and maximum surface continuity.

Moisture resistant MDF construction provides protection against high levels of humidity and occasional wetting of installation area (basements, baths, kitchens)

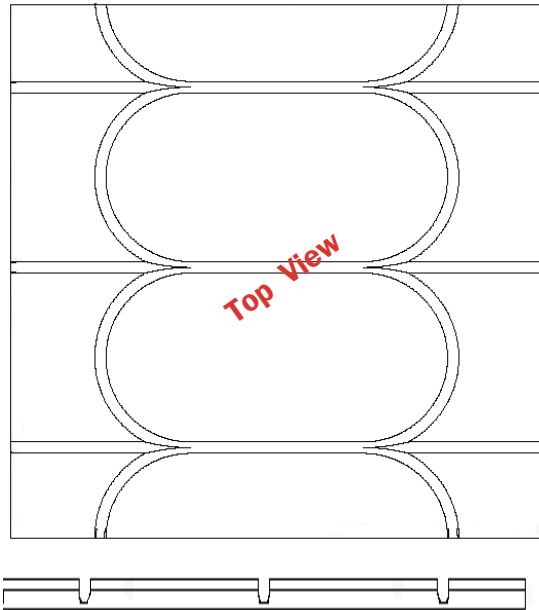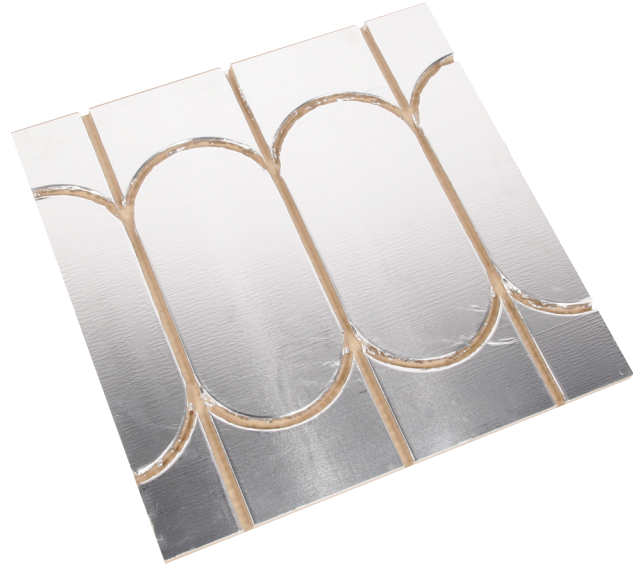

Side View

ComfortPro Systems at 800-968-8905

www.comfortprosystems.com

A better approach a better system!

Width :	24"
Length :	24"
Overall Height :	5/8"
Channel Spacing :	8"
Weight :	10 Lbs. per panel-
Material:	Molsture Resistant Medium Density Fiber Board (MR-MDF)
Tubing Requirements	3/8" PEX Tubing (ASTM F-876/877)

Output Chart

Outputs provided for 3/8" PEX Tubing on Floorpanel with 8" on center spacing using a 20° F. delta T. operating at steady state performance.

